




PLAN SHOWING THE PROPOSED CONSTRUCTION OF RCC ROOF G.F. RESIDENTIAL BUILDING IN S.F. NO. 137/2A3, PATTA NO. 1637 IN THIMMAIKUTHU VILLAGE & PANCHAYAT, POLLACHI TALUK, COIMBATORE DISTRICT.




FRONT ELEVATION



SECTION - AA'




PLAN

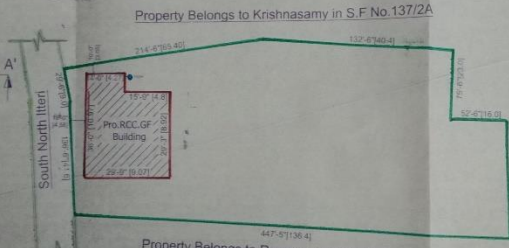


Property Belongs to Krishnasamy in S.F. No. 137/2A

Property Belongs to Ramasamy Gounder in S.F. No. 138 & 9 Ft Wide East West Pathway for common usage to Partition Members

SITE PLAN

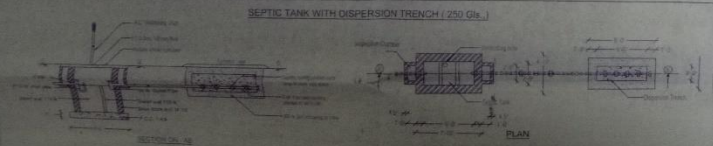

SEPTIC TANK WITH DISPERSION TRENCH (250 Gm.)



Rain Water Percolation Pit

Office Use:

APPROVED
As per A/Sect-22
Dated: 05.12.22
Subject to all conditions specified in this office order attached.

M. B. S. ENGINEERS
Pollachi Taluk, Coimbatore District

Scale: Plan 1:100, Site Plan NTS

Area details: Area of the Site 1.72 Acre, Area of the Pro RCC G.F. Building 965.00 Sq. ft. / 89.65 Sq. m.

Schedule of Joineries		
MD	Main Door	5'-0" x 7'-0" (1.52 x 2.13)
D	Door	3'-0" x 7'-0" (0.91 x 2.13)
D1	Door 1	3'-0" x 7'-0" (0.91 x 2.13)
D	Door	3'-0" x 7'-0" (0.91 x 2.13)
AD	Arch Door	4'-0" x 7'-0" (1.22 x 2.13)
KW	Kitchen Window	3'-0" x 3'-0" (0.91 x 0.91)
W	Window	4'-0" x 4'-0" (1.22 x 1.22)
V	Ventilator	2'-0" x 2'-0" (0.61 x 0.61)

Reference:

Site Boundary: [Symbol]
Pro. Building: [Symbol]
Road: [Symbol]
Rwh: [Symbol]

Applicant Name: 1. Mrs. Lakshmi, 2. Mr. Mahalingam @ Manimuthu (Late), 2. Mr. Vasanthakumar, 3. Mr. Mahalingam @ Manimuthu (Late)

Applicant: [Signature]

E. D. V. TARAN, B.E., MARCH, 2023
THOZHA ASSOCIATES
Civil Engineering Consultants
(Registered) Engineers & Architects
No. 48, Sankar, Coimbatore District, Coimbatore
Tamil Nadu - 641 003, 641 004, 641 005

L.B.S. ENGINEERS



THOZHA ASSOCIATES

Er. D.V.Taran B.E., MISTE., RE -II.,
Civil Engineering Consultant
Registered Engineer Grade - II
Reg.No. 076/LS/2020/00001

98431 61705 | 96293 40263

Er. A.Sampathkumar B.E.,
Civil Engineering Consultant
96590 49706

Abstract and Detailed Estimate of the Proposed Construction of R.C.C Roof

G.F Residential building in S.F No.137/2A, Patta No.1637.

in Thimmankuthu Village & Panchayat, Pollachi Taluk, Coimbatore District.

Applicant Name: Mrs.Lakshmi, W/o Mr.Mahalingam @ Marimuthu (Late)

Mr.Vasanthakumar, S/o Mr.Mahalingam @ Marimuthu (Late)

E.A.No.4/2021-2022, Dt:05.10.2021, By The President,Thimmankuthu Panchayat

Builtup Area Details:

Pro.RCC roof G.F Building : 965.00 Sqft (Or) 89.65 Sqm

Estimate Amount : Rs. 25,20,000/- (Rupees Twenty Five Lakh and Twenty Thousands only)

Sl.No	Description of Work	Nos	Measurements			Quantity	Unit Rate	Total Amount
			L in 'm'	B in 'm'	D in 'm'			
1	Ground floor	1	***	***	***	***	***	1542593.85
2	Provision for Compound wall arrangements	1	***	***	***	L.S	L.S	225000.00
3	Provision for Amenities	1	***	***	***	L.S	L.S	745000.00
4	Provision for Rain Water harvesting	1	***	***	***	L.S	L.S	5000.00
5	Miscellaneous and Sundries	1	***	***	***	L.S.	L.S	2406.15
Total								2520000.00

The total cost for the Proposed construction of above RCC Roof GF Residential Building is Rs. 25,20,000/- (Rupees Twenty Five Lakhs and Twenty Thousands only)

Er. D.V. TARAN, B.E., MISTE., RE-II
THOZHA ASSOCIATES
Civil Engineering Consultant
Registered Engineer Grade - II
(Pollachi Municipality)
No.60, Suryan Complex, Ayyappan Kovil Street,
Venkatesa Colony, Pollachi - 642 001.
Cell : 98431 61705, 96293 40263

Abstract and Detailed Estimate of the Proposed Construction of R.C.C Roof**G.F Residential building in S.F No.137/2A, Patta No.1637,****in Thimmankuthu Village & Panchayat, Pollachi Taluk , Coimbatore District.****Applicant Name: Mrs.Lakshmi, W/o Mr.Mahalingam @ Marimuthu (Late)****Mr.Vasanthakumar, S/o Mr.Mahalingam @ Marimuthu (Late)****B.A.No.4/2021-2022, Dt:05.10.2021, By The President,Thimmankuthu Panchayat****Buildup Area Details:****Pro.RCC roof G.F Building : 965.00 Sqft (Or) 89.65 Sqm****Estimate Amount : Rs. 25,20,000/- (Rupees Twenty Five Lakh and Twenty Thousands only)**

Sl.No	Description of work	Nos	Measurements			Quantity in 'm3'/'m2	Unit Rate	Total Amount		
			L in 'm'	B in 'm'	D in 'm'					
	GROUND FLOOR									
1	Earth work excavation for foundation (for narrow excavation) in all soils and sub-soils and to full depth as may be directed						350.00	21258.60		
	for Main walls alround	1	37.01	0.91	1.15	38.73				
	for Horizontal Cross walls	1	8.61	0.91	1.15	9.01				
	for Vertical Cross walls	2	3.58	0.91	1.15	7.49				
	for Vertical Cross walls	1	5.26	0.91	1.15	5.50				
	Total					60.74				
2	Cement Concrete 1:5:10 (One Cement, Five sand and Ten hard broken stone jelly) using 40 mm gauge hard broken granite stone jelly for foundation						3500.00	26018.27		
	for Main walls alround	1	37.01	0.91	0.15	5.05				
	for Horizontal Cross walls	1	8.61	0.91	0.15	1.18				
	for Vertical Cross walls	2	3.58	0.91	0.15	0.49				
	for Vertical Cross walls	1	5.26	0.91	0.15	0.72				
	Total					7.43				
3	Supplying and filling in foundation, basement, etc with filling sand in layers of not more than 15 cm thick well watered, rammed and consolidated etc. complete						700.00	41766.54		
	Hall	1	5.17	5.02	0.35	9.08				
	Kitchen	1	3.35	2.44	0.35	8.17				
	Dining	1	3.35	2.44	0.35	8.17				
	Bed room	1	5.17	3.35	0.35	17.32				
	Bed room	1	3.05	3.35	0.35	10.22				
	Toilet	2	1.83	1.83	0.35	6.70				
	Total					59.67				
4	R.R Masonary in cement mortar1:5(one cement,and five sand) for foundation and basement including simultaneously pointing above ground level with the same mortar etc.,complete								4500.00	219861.32
	1st footing									
	for Main walls alround	1	37.01	0.76	0.46	12.94				
	for Horizontal Cross walls	1	8.61	0.76	0.46	3.01				
	for Vertical Cross walls	2	3.58	0.76	0.46	2.50				
	for Vertical Cross walls	1	5.26	0.76	0.46	1.84				
	2nd footing									
	for Main walls alround	1	37.01	0.61	0.46	10.39				
	for Horizontal Cross walls	1	8.61	0.61	0.46	2.42				
	for Vertical Cross walls	2	3.58	0.61	0.46	2.01				
	for Vertical Cross walls	1	5.26	0.61	0.46	1.48				
	Basement footing									
	for Main walls alround	1	37.01	0.46	0.46	7.83				
	for Horizontal Cross walls	1	8.61	0.46	0.46	1.82				
	for Vertical Cross walls	2	3.58	0.46	0.46	1.52				
	for Vertical Cross walls	1	5.26	0.46	0.46	1.11				
	Total					48.86				
5	Cement Concrete 1:5:10 (One cement, Five sand and Ten hard broken stone) using 40 mm gauge hard broken jelly for flooring						3500.00	29466.44		
	Hall	1	5.17	5.02	0.11	2.85				
	Kitchen	1	3.35	2.44	0.11	0.90				
	Dining	1	3.35	2.44	0.11	0.90				
	Bed room	1	5.17	3.35	0.11	1.91				
	Bed room	1	3.05	3.35	0.11	1.12				
	Toilet	2	1.83	1.83	0.11	0.74				
	Total					8.42				




Sl.No	Description of Work	Nos	Measurements			Quantity in 'm3'/'m2'	Unit Rate	Total Amount
			L in 'm'	B in 'm'	D in 'm'			
6	Brick work in following Cement Mortar using best quality II class table moulded chamber burnt bricks of size 9" x 4-1/2" x 3" for foundation and basement including curing, etc.,							
	Upto Roof Level							
	for Main walls around	1	37.01	0.23	3.05	25.96		
	for Horizontal Cross walls	1	8.61	0.23	3.05	6.04		
	for Vertical Cross walls	2	3.58	0.23	3.05	5.02		
	for Vertical Cross walls	1	5.26	0.23	3.05	3.69		
	for Partition walls	1	3.35	0.11	3.05	1.12		
	for Partition walls	1	3.28	0.11	3.05	1.10		
	for Partition walls	1	2.05	0.11	3.05	0.69		
	for Parapet walls around	1	37.01	0.23	0.76	6.47		
	Total					50.10		
	Deduction for Opening							
	Main Door - MD	1	1.52	0.23	2.13	0.74		
	Door - D	2	1.00	0.23	2.13	0.98		
	Door - D1	3	0.76	0.23	2.13	1.12		
	Area Open - AO	1	1.22	0.11	2.13	0.29		
	Open - O	1	0.91	0.11	2.13	0.21		
	Window - W	7	1.22	0.23	1.22	2.40		
	Kitchen Window - KW	2	0.91	0.23	0.91	0.38		
	Ventilator - V	3	0.61	0.23	0.61	0.26		
	Sub Total					6.37		
	Total less deduction					43.72	8500.00	371637.60
7	Cement Concrete 1:2:4 (One Cement, Two sand and Four hard broken stone jelly) using 20 mm gauge hard broken granite stone jelly for all RCC items of works excluding cost of reinforcement grill and fabricating charges, centering and shuttering but including laying, vibrating with mechanical vibrators, finishing, curing, etc.							
	Plinth Beam :							
	for Main walls around	1	37.01	0.38	0.11	1.55		
	for Horizontal Cross walls	1	8.61	0.38	0.11	0.36		
	for Vertical Cross walls	2	3.58	0.38	0.11	0.30		
	for Vertical Cross walls	1	5.26	0.38	0.11	0.22		
	Total					2.43	16500.00	40030.19
	Lintel:							
	for Main walls around	1	37.01	0.23	0.15	1.28		
	for Horizontal Cross walls	1	8.61	0.23	0.15	0.30		
	for Vertical Cross walls	2	3.58	0.23	0.15	0.25		
	for Vertical Cross walls	1	5.26	0.23	0.15	0.18		
	for Partition walls	1	3.35	0.11	0.15	0.06		
	for Partition walls	1	3.28	0.11	0.15	0.05		
	for Partition walls	1	2.05	0.11	0.15	0.03		
	Total					2.15	16500.00	35402.40
	Sunshade:							
	for Sunshades	1	25.87	0.61	0.07	1.10		
	Total					1.10	16500.00	18226.71
	RCC Roof Slab :							
	Main Building Roof Slab 1	1	8.92	9.07	0.11	8.90		
	Main Building Roof Slab 2	1	2.06	4.26	0.11	0.97		
Total RCC Roof Slab Work					9.86	16500.00	162769.20	
8	Provision for Doors, Windows & Ventilator using Teak wood							
	Main Door - MD	1	1.52	***	2.13	3.24		
	Door - D	2	1.00	***	2.13	4.26		
	Door - D1	3	0.76	***	2.13	4.86		
	Window - W	7	1.22	***	1.22	10.42		
	Kitchen Window - KW	2	0.91	***	0.91	1.66		
	Ventilator - V	3	0.61	***	0.61	1.12		
	Sub Total					25.55	12500.00	319316.25
	Plastering with Cement Mortar 1:5 (One cement and Five sand), 12mm thick in all floors including curing etc. complete complying with standard specification and as directed by the departmental officers.							
	External & Internal		43.72 X 2 / 0.23			380.17		
	Total					380.17	350.00	133059.50
10	Special ceiling plastering and finishing the exposed surface of all RCC items of work such as slabs, beams, sunshades, facia, canopy slab, staircase waist slab, landing slab etc.,							



Sl.No	Description of Work	Nos	Measurements			Quantity in 'm3'/'m2'	Unit Rate	Total Amount
			L in 'm'	B in 'm'	D in 'm'			
	Hall	1	5.17	5.02	***	25.95	450.00	7101.32
	Kitchen	1	3.35	2.44	***	8.17		
	Dining	1	3.35	2.44	***	7.39		
	Bed room	1	5.17	3.35	***	17.32		
	Bed room	1	3.05	3.35	***	7.39		
	Toilet	2	1.83	1.83	***	6.70		
	for Sunshades	1	25.87	0.61	***	15.78		
	Total					15.78		
11	Paving the floor with best quality Granites Tiles of size 600 x 600 x 8mm of approved colour, shade and quality laid in cement mortar 1:3 (one cement and three sand) 20mm thick in all floors						1600.00	116679.52
	Hall	1	5.17	5.02	***	25.95		
	Kitchen	1	3.35	2.44	***	8.17		
	Dining	1	3.35	2.44	***	7.39		
	Bed room	1	5.17	3.35	***	17.32		
	Bed room	1	3.05	3.35	***	7.39		
	Toilet	2	1.83	1.83	***	6.70		
						72.92		
12	Provision for weathering coarse	1	***	***	***	L.S	L.S	80000.00
13	Provision for Drainage arrangements	1	***	***	***	L.S	L.S	75000.00
14	Provision for Water Supply arrangements (Water line ,OHT, Sump	1	***	***	***	L.S	L.S	100000.00
15	Provision for Electrical arrangements	1	***	***	***	L.S	L.S	75000.00
16	Provision for plumbing arrangements	1	***	***	***	L.S	L.S	65000.00
17	Provision for white washing	1	***	***	***	L.S	L.S	50000.00
18	Provision for Colour washing 2 Coats	1	***	***	***	L.S	L.S	100000.00
19	Provision for Putty 2 coats Inner & Outer	1	***	***	***	L.S	L.S	150000.00
20	Provision for Front Elevation works	1	***	***	***	L.S	L.S	50000.00
21	Provision for Compound wall works	1	***	***	***	L.S	L.S	225000.00
22	Provision for Rain Water harvesting	1	***	***	***	L.S	L.S	5000.00
23	Miscellaneous and Sundries	1	***	***	***	L.S	L.S	2406.15
							Total	2520000.00

The total cost for the Proposed construction of above RCC Roof GF Residential Building is Rs. 25,20,000/- (Rupees Twenty Five Lakh and Twenty Thousands only)


Er. D.V. TARAN, B.E., MISTE., R.E.
THOZHA ASSOCIATES
 Civil Engineering Consultant
 Registered Engineer Grade - II
 (Pollachi Municipality)
 No.60, Suriyan Complex, Ayyappan Kovil Street,
 Venkatesa Colony, Pollachi - 642 001.
 Cell : 98431 61705, 96293 40263